

Myers®

S Series 4" Submersible Well Pumps

- Stainless Steel Construction
- 5, 10, 16, 25, 40 & 75 gpm
- 1/2 - 10 HP



Outstanding Features:

All stainless steel construction

- Excellent corrosion resistance
- Durable

Strong pump performance

- High pressure and flow capabilities
- Maximum efficiency

Long life

- Smooth, quiet operation
- Stainless steel construction
- Sand handling capabilities

Built with quality components

- Internal check valve
- Rugged suction screen
- Heavy duty shaft
- Bressed & pinned shaft/coupling assembly
- Simple and easy lead guard assembly
- Smooth safety hook
- Sand handling alignment bearing at every stage



**Quality, Sand Handling
SST Staging**



Internal Built-in Check Valve





**Pressed & Pinned
Shaft/Coupling Assembly**



Rugged Suction Screen

4" Stainless Steel Submersible Pumps

			2-WIRE COMPLETE UNIT			3-WIRE COMPLETE UNIT			PUMP END ONLY		
Flow Rate	Motor HP	Volts	Model Number	Length In.	Weight Lbs.	Model Number	Length In.	Weight Lbs.	Model Number	Length In.	Weight Lbs.
5	1/2	230	2S52-5	26-3/8	29	3S52-5	26-3/8	29	S5-5	16-7/8	11
5	3/4	230	2S72-5	31-1/2	33	3S72-5	31-1/2	33	S7-5	21	13
5	1	230	2S102-5	36-1/4	38	3S102-5	36-1/4	38	S10-5	24-1/4	15
5	1-1/2	230	2S152-5	45-1/8	48	3S152-5	43-1/8	45	S15-5	29-5/8	17
5	2	230	---	---	---	3S202-5	55-3/4	55	S20-5	40-3/4	25
5	3	230	---	---	---	3S302-5	73-5/8	82	S30-5	50-1/8	30
0	1/2	115	2S51-10	23	25	3S51-10	23	25	S5-10	13-1/2	7
0	1/2	230	2S52-10	23	25	3S52-10	23	25	S5-10	13-1/2	7
0	3/4	230	2S72-10	26-1/2	29	3S72-10	26-1/2	29	S7-10	16	10
0	1	230	2S102-10	30-1/2	33	3S102-10	30-1/2	33	S10-10	18-1/2	10
0	1-1/2	230	2S152-10	39	43	3S152-10	37	40	S15-10	23-1/2	12
0	2	230	---	---	---	3S202-10	45-3/8	46	S20-10	30-3/8	16
0	3	230	---	---	---	3S302-10	59-3/4	74	S30-10	36-1/4	22
0	5	230	---	---	---	3S502-10	77-5/8	98	S50-10	48-1/8	29
6	1/2	115	2S51-16	21-3/4	23	3S51-16	21-3/4	23	S5-16	12-1/4	5
6	1/2	230	2S52-16	21-3/4	23	3S52-16	21-3/4	23	S5-16	12-1/4	5
6	3/4	230	2S72-16	23-1/4	27	3S72-16	23-1/4	27	S7-16	12-3/4	7
6	1	230	2S102-16	28-3/8	31	3S102-16	28-3/8	31	S10-16	16-3/8	8
6	1-1/2	230	2S152-16	33-1/8	42	3S152-16	31-1/8	39	S15-16	17-5/8	11
6	2	230	---	---	---	3S202-16	36	42	S20-16	21	12
6	3	230	---	---	---	3S302-16	49-1/2	67	S30-16	26	15
6	5	230	---	---	---	3S502-16	69-3/8	93	S50-16	39-7/8	24
5	1/2	230	2S52-25	18-1/8	25	3S52-25	18-1/8	25	S5-25	8-5/8	7
5	3/4	230	2S72-25	20-3/4	27	3S72-25	20-3/4	27	S7-25	10-1/4	7
5	1	230	2S102-25	23-7/8	31	3S102-25	23-7/8	31	S10-25	11-7/8	8
5	1-1/2	230	2S152-25	29	39	3S152-25	27	36	S15-25	13-1/2	8
5	2	230	---	---	---	3S202-25	30-1/4	39	S20-25	15-1/4	9
5	3	230	---	---	---	3S302-25	42	62	S30-25	18-1/2	10
5	5	230	---	---	---	3S502-25	57-1/8	84	S50-25	27-5/8	15
5	7-1/2	230	---	---	---	3S752-25	---	---	S75-25	42-3/4	24
0	1	230	2S102-40	24-7/8	32	3S102-40	24-7/8	32	S10-40	12-7/8	9
0	1-1/2	230	2S152-40	31-3/4	42	3S152-40	29-3/4	39	S15-40	16-1/4	11
0	2	230	---	---	---	3S202-40	34-1/2	43	S20-40	19-1/2	13
0	3	230	---	---	---	3S302-40	46-3/8	68	S30-40	22-7/8	16
0	5	230	---	---	---	3S502-40	62-1/4	92	S50-40	32-3/4	23
0	7-1/2	230	---	---	---	---	---	---	S75-40	49-3/8	35
0	10	230	---	---	---	---	---	---	S100-40	57-5/8	40
5	2	---	---	---	---	---	---	---	S20-75	15	8
5	3	---	---	---	---	---	---	---	S30-75	20	10
5	5	---	---	---	---	---	---	---	S50-75	27-3/4	14
5	7-1/2	---	---	---	---	---	---	---	S75-75	38	18
5	10	---	---	---	---	---	---	---	S100-75	50-3/4	23

Discharge Sizes:


The 5, 10 and 16 gallon SST pumps have 1-1/4" discharge

The 25 gallon SST pumps have 1-1/2" discharge


The 40 and 75 gallon SST pumps have 2" discharge

S Series Performance


5 GPM

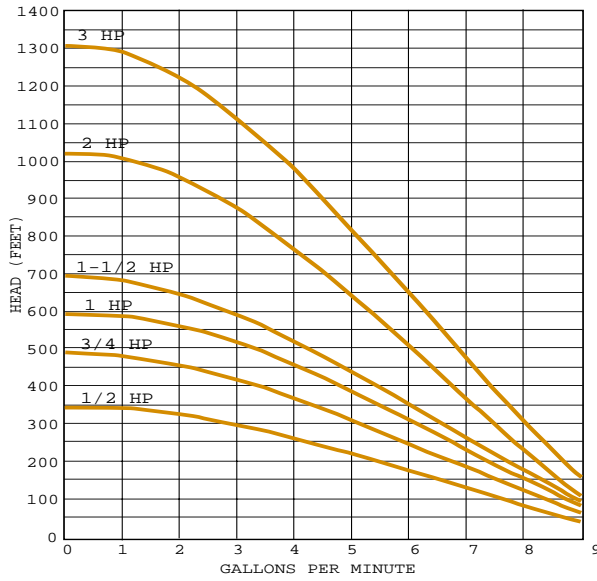


10 GPM

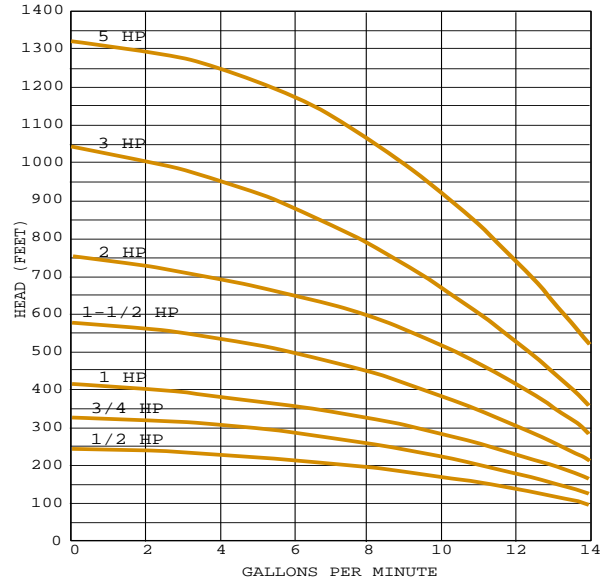


16 GPM

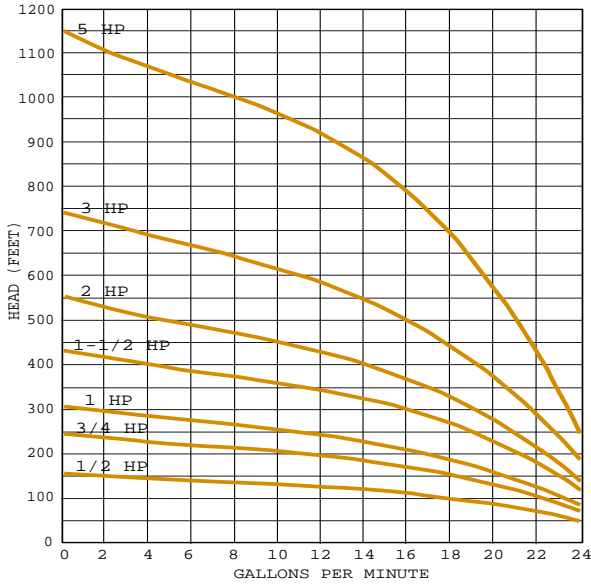

25 GPM

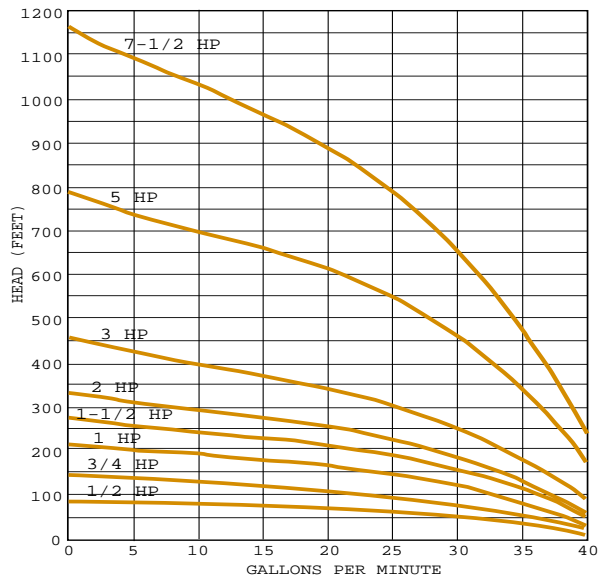

40 GPM

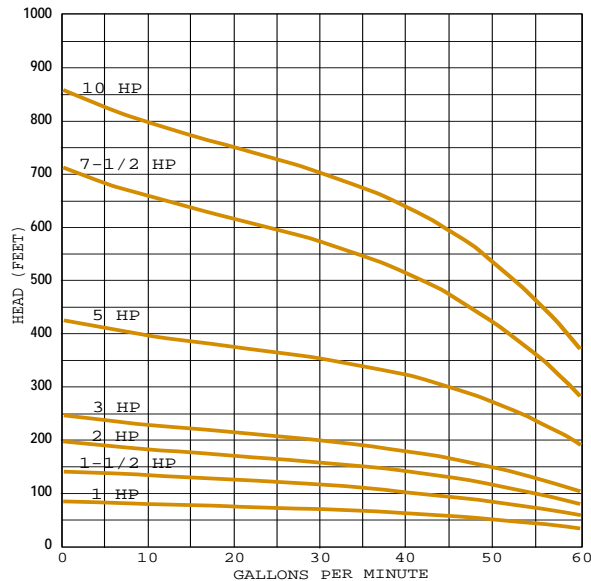

75 GPM

